

STANDARD - ECONOMY PIANO HINGE

The most **economical** choice for installation into drywall, masonry and tiled surfaces, this door has unique features.

The mounting flange is a constituent part of the door frame. This **"two in one" construction** ensures strength and durability.

The door is affixed to the frame with a **continuous piano hinge**. It sits in a slightly raised position.

Screwdriver operated cam locks come standard with each door. Alternative latches are available.

Installation:


Mounting tabs on the flange can be folded back for quick and easy installation onto drywall. Alternatively, pre-punched mounting holes can be used to secure the door onto adjacent studs.

Material:

Access doors are manufactured with satin coat steel for maximum strength, durability and resistance to corrosion.

Available Options:

Non-standard door sizes or modifications
Powder paint finish

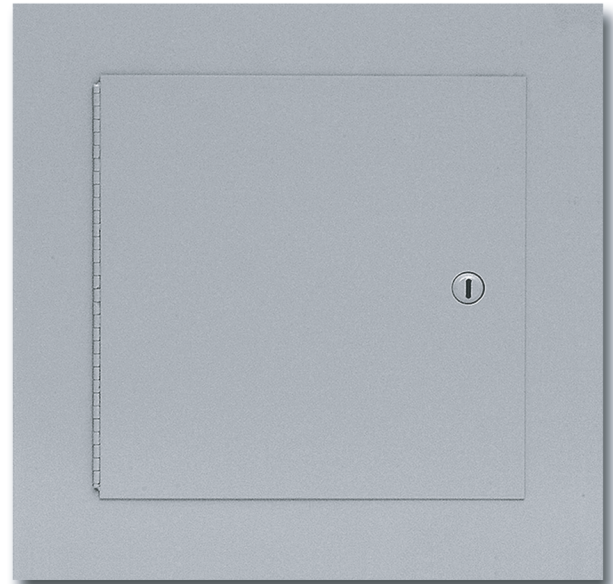

DOOR SIZE Inches B x A	WALL OPENING Inches Wd. x Ht. x Dp.	MATERIAL GA.	NO. of LATCHES	SHIPPING Wt.	
				lbs.	kg.
6 x 6	6 x 6	20	1	1.30	0.59
8 x 8	8 x 8	20	1	1.90	0.86
10 x 10	10 x 10	20	1	2.30	1.04
12 x 12	12 x 12	20	1	3.10	1.41
14 x 14	14 x 14	20	1	4.10	1.86
16 x 16	16 x 16	20	1	5.25	2.38
18 x 18	18 x 18	20	1	5.90	2.68
20 x 20	20 x 20	20	1	7.05	3.20
24 x 24	24 x 24	20	3	9.95	4.52

