

**DRYWALL BEAD ACCESS DOOR**


**MARFAB DBF** access doors are designed for drywall installation. The door is flush to the frame with drywall corner beads on all sides. Once installed, the outer flange is concealed and only the door is visible.

**Installation:**

Place door in wall opening and secure using the 3/16" pre-punched mounting holes in the frame. Apply drywall cement over beading.

**Latch:** Standard screwdriver operated cam.  
Optional cylinder lock.

**Hinge:** Concealed pivot hinge

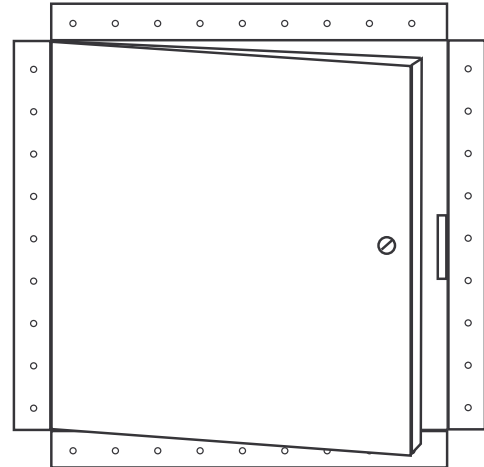

PART No.	DOOR SIZE Inches A x B	WALL OPENING Inches Wd. x Ht.	No. of LATCHES
AD-DBF-06	6x6	6 3/8 x 6 3/8	1
AD-DBF-08	8x8	8 3/8 x 8 3/8	1
AD-DBF-12	12x12	12 3/8 x 12 3/8	1
AD-DBF-16	16x16	16 3/8 x 16 3/8	1
AD-DBF-18	18x18	18 3/8 x 18 3/8	1
AD-DBF-24	24x24	24 3/8 x 24 3/8	1
AD-DBF-26	26x26	26 3/8 x 26 3/8	1

**Material:**

Frame is manufactured from 16 gage satin coat steel.  
Door is manufactured from 20 gage satin coat steel.

**Finish:** "Primer white" powder coat finish

**Available Options:**

- Non-standard door sizes
- Alternative paint colours and colour matching

